

70 MHz SAW Filter

162895


Specifications

Parameter	Unit	Min.	Typical	Max.
Center Frequency	MHz	69.8	70.0	70.2
Insertion Loss at f_0	dB	-	9.2	10.5
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Temperature Coefficient	ppm/°C	-	-94	-
Amplitude Ripple within $f_0 \pm 2.1$ MHz	dB _{p-p}	-	0.6	1.0
-1dB Bandwidth	MHz	5.0	5.3	-
-3dB Bandwidth	MHz	5.5	5.8	-
-40dB Bandwidth	MHz	-	7.85	8.2
Relative Attenuation:				
10 ~ 64 MHz	dB	40	45	-
76 ~ 140 MHz	dB	40	42	-
Group Delay Variation within $f_0 \pm 2.1$ MHz	ns	-	80	200
Absolute Delay at f_0	μ s	-	1.30	-
IN/OUT Return Loss at f_0	dB	-	-	-
Package Type & Size		V		
Length X Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

Notes: (1) With Matching Network (Ref. Testing Environment Circuit as shown below).

Those impedances could be modified with different impedance values and/or structures, if necessary.

Package Outline

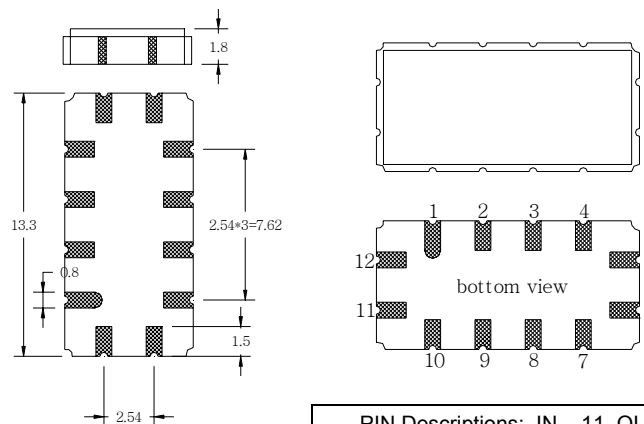


PIN Descriptions: IN – 11, OUT – 5,
GROUND – 1,2,3,4,6,7,8,9,10,12

70 MHz SAW Filter

162895



Testing Environment

Source & Load Impedance: 50 Ω

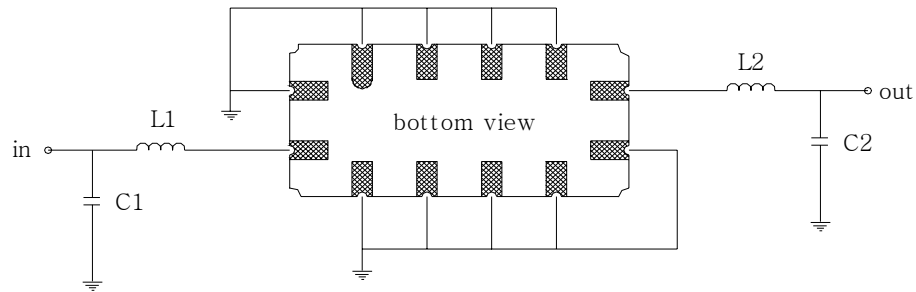

Test Fixture & Values	
Input	L1=220nH Q >40 , C1=36pF
Output	L2=180nH Q.>40 , C2=24pF

Frequency Response

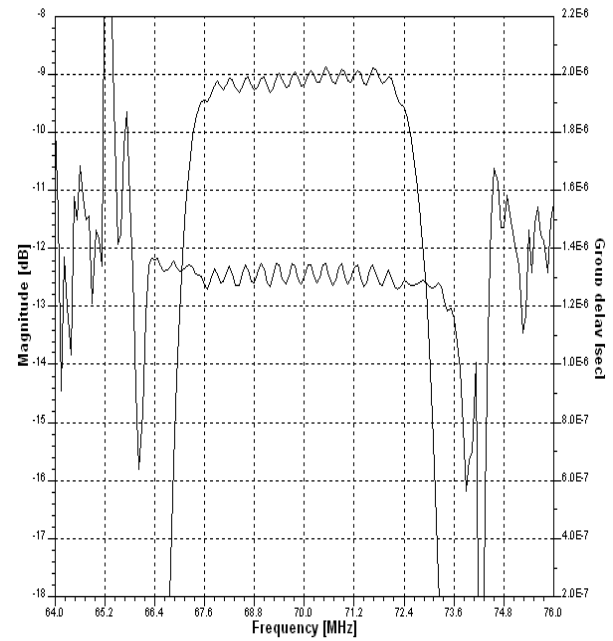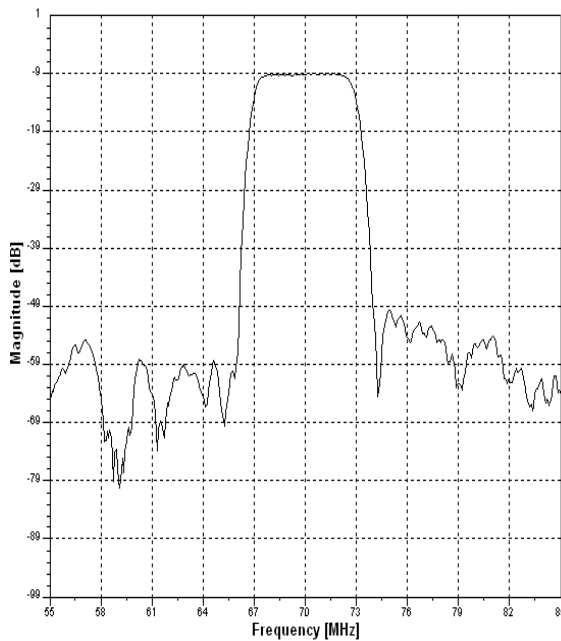

COM DEV SAW PRODUCTS