

881 MHz RF SAW Filter


162960

Specifications

Parameter	Unit	Min	Typical	Max
Center Frequency	MHz	-	881.5	-
Insertion Loss within 869 ~ 894 MHz	dB	-	2.2	3.0
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Operating Temperature Range	$^{\circ}\text{C}$	-30	-	+80
Amplitude Ripple within 869 ~ 894 MHz	dB _{p-p}	-	0.6	1.5
Attenuation:				
D.C. ~ 779 MHz	dB	50	60	-
779 ~ 849 MHz	dB	42	47	-
914 ~ 970 MHz	dB	26	30	-
970 ~ 1049 MHz	dB	50	58	-
1049 ~ 2000 MHz	dB	45	55	-
VSWR within 869 ~ 894 MHz	-	-	1.6	2.0
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Package type & size			M	
Length X Width	mm ²	-	3.0 X 3.0	-
Height	mm	-	-	1.3


Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).

Package Outline

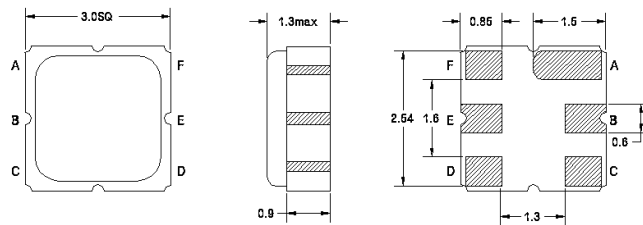

PIN Descriptions	
IN	E
Out	B
Ground	A, C, D, F

Testing Environment





Source & Load Impedance 50 Ω



881 MHz RF SAW Filter

162960



Frequency Response

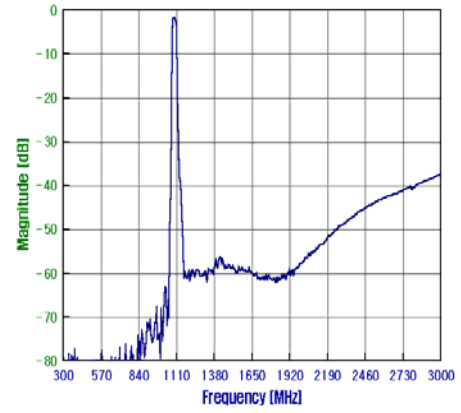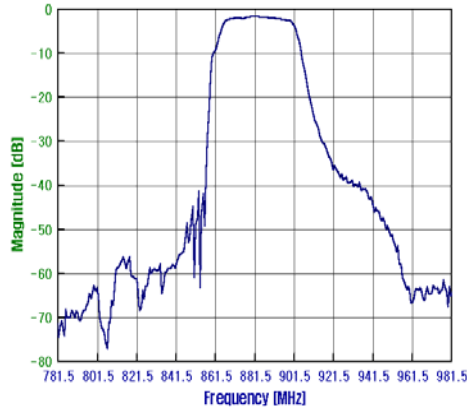

VSWR

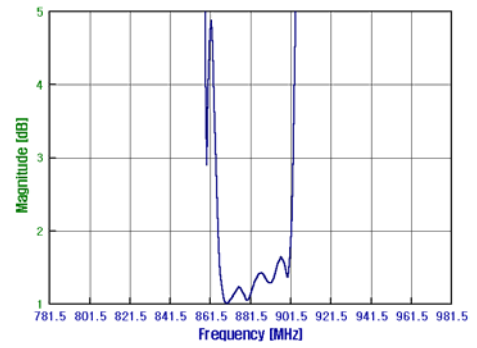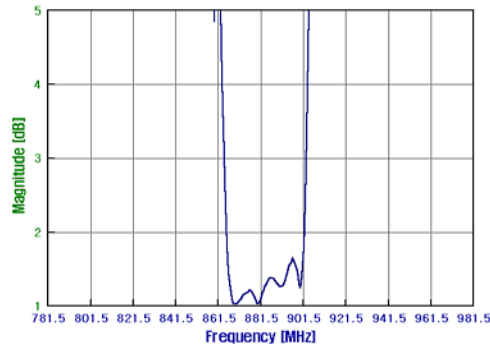

Smith Chart

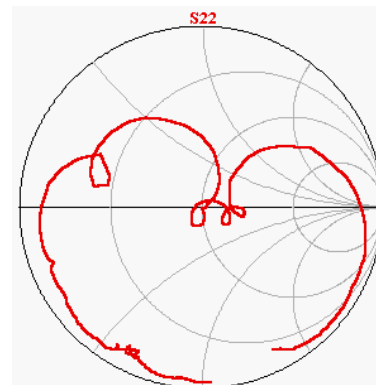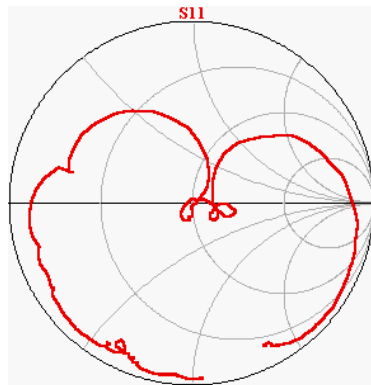

SAW PRODUCTS

COM DEV