

1575 MHz GPS, RF SAW Filter


162977

Specifications

Parameter	Unit	Min	Typical	Max
Center Frequency (f_0)	MHz	-	1575.42	-
Insertion Loss within 1574.42 ~ 1576.42 MHz	dB	-	1.7	2.2
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Operating Temperature Range	$^{\circ}\text{C}$	-40	-	+85
Amplitude Ripple within 1574.42 ~ 1576.42 MHz	dB _{p-p}	-	0.3	1.0
Attenuation:				
D.C. ~ 1400 MHz	dB	35	37	-
1400 ~ 1475 MHz	dB	30	34	-
1475 ~ 1525 MHz	dB	25	32	-
1625 ~ 1640 MHz	dB	30	41	-
1640 ~ 2000 MHz	dB	30	34	-
2000 ~ 3000 MHz	dB	20	25	-
VSWR within 1574.42 ~ 1576.42 MHz	-	-	1.2	2.0
Maximum DC Voltage	V	-	-	7.5
Maximum Input Power	dBm	-	-	20
Package type & size			M	
Length X Width	mm ²	-	2.5 X 2.0	-
Height	mm	-	-	1.0


Notes: No Matching Network (Ref. Testing Environment Circuit as shown below).

Package Outline

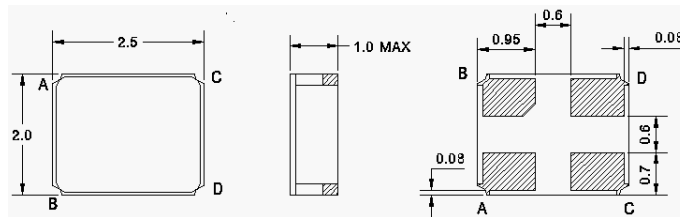

PIN Descriptions	
IN	B
Out	C
Ground	A,D

Testing Environment





Source & Load Impedance 50 Ω



1575 MHz GPS, RF SAW Filter

162977



Frequency Response

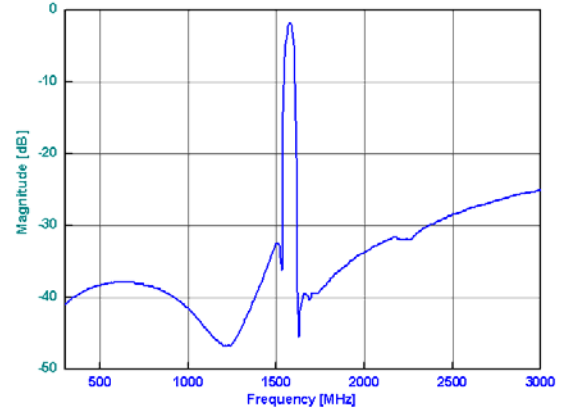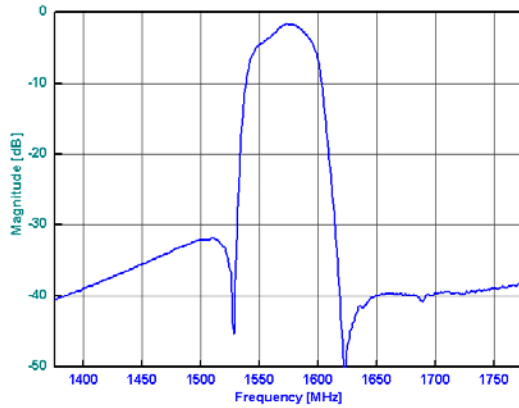

VSWR

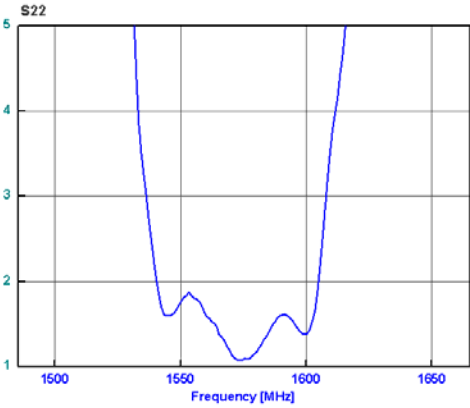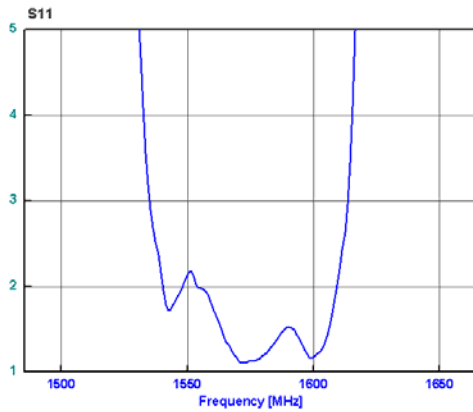

Smith Chart

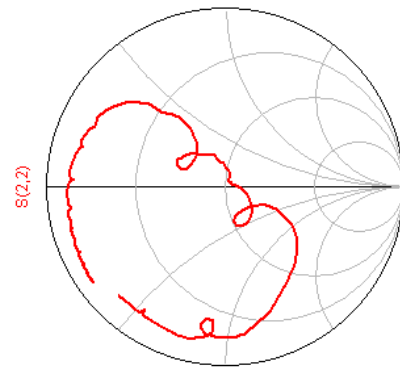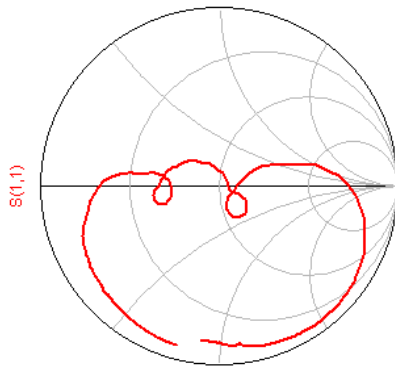

SAW PRODUCTS

COM DEV