


250.0 MHz RF SAW Filter

162986


Specifications

Parameter	Unit	Min	Typical	Max
Center Frequency (f_0)	MHz	-	250	-
Passband Width	MHz	-	$f_0 \pm 2.5$	-
Insertion Loss (in Passband)	dB	-	3.0	4.0
Ripple (in Passband)	dB	-	1.5	2.5
Stop Band Attenuation DC ~ $f_0 - 42.8$ $f_0 + 40.0 \sim f_0 + 200.0$	MHz	50	55	-
Terminating Impedance	Ω/pF	150/0		

Frequency Response

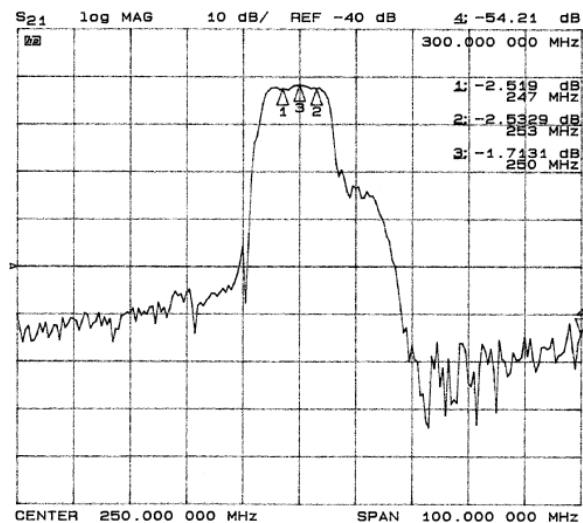

Package Outline

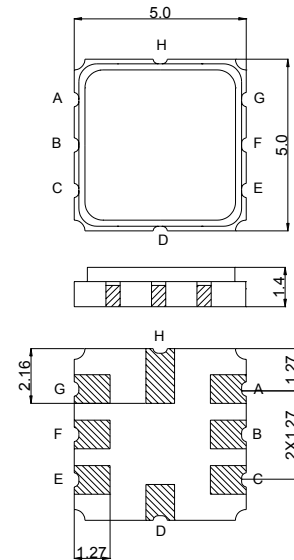

Test Fixture

