


422.0 MHz SAW Filter

162992


Specifications

Parameter	Unit	Min	Typical	Max
Center Frequency (f_0)	MHz	-	422.0	-
Insertion Loss within 415 ~ 429 MHz	dB	-	2.5	4.0
Ripple	dB	-	0.8	1.5
Attenuation:				
$f_0 - 200 \sim f_0 - 42.8$ MHz	dB	45	50	-
$f_0 + 42.8 \sim f_0 + 200$ MHz	dB	50	55	-
Terminating Impedance	Ω/pF	50/0		


Package Outline

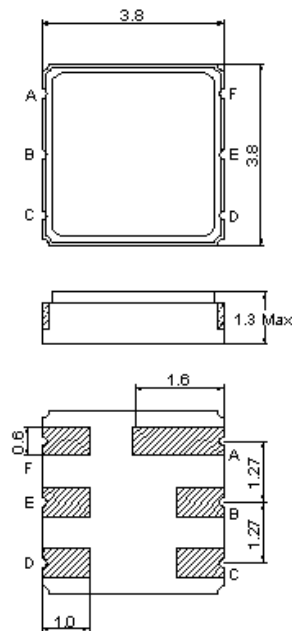

Frequency Response

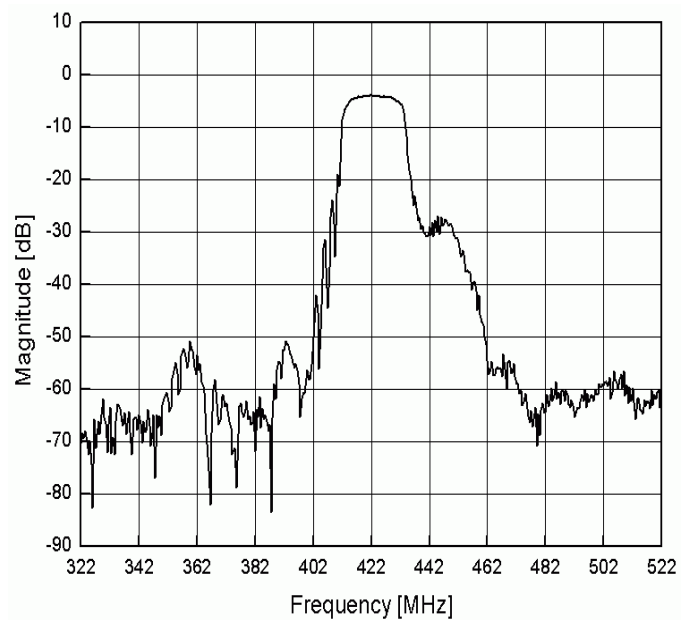

Testing Environment

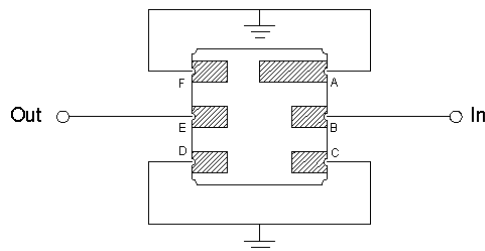

PIN Descriptions	
IN	B
Out	E
Ground	A,C,D,F

SAW PRODUCTS

COM DEV