



Underwater Servo

DWTM-2408, DWTM-4850

DWTM-2408

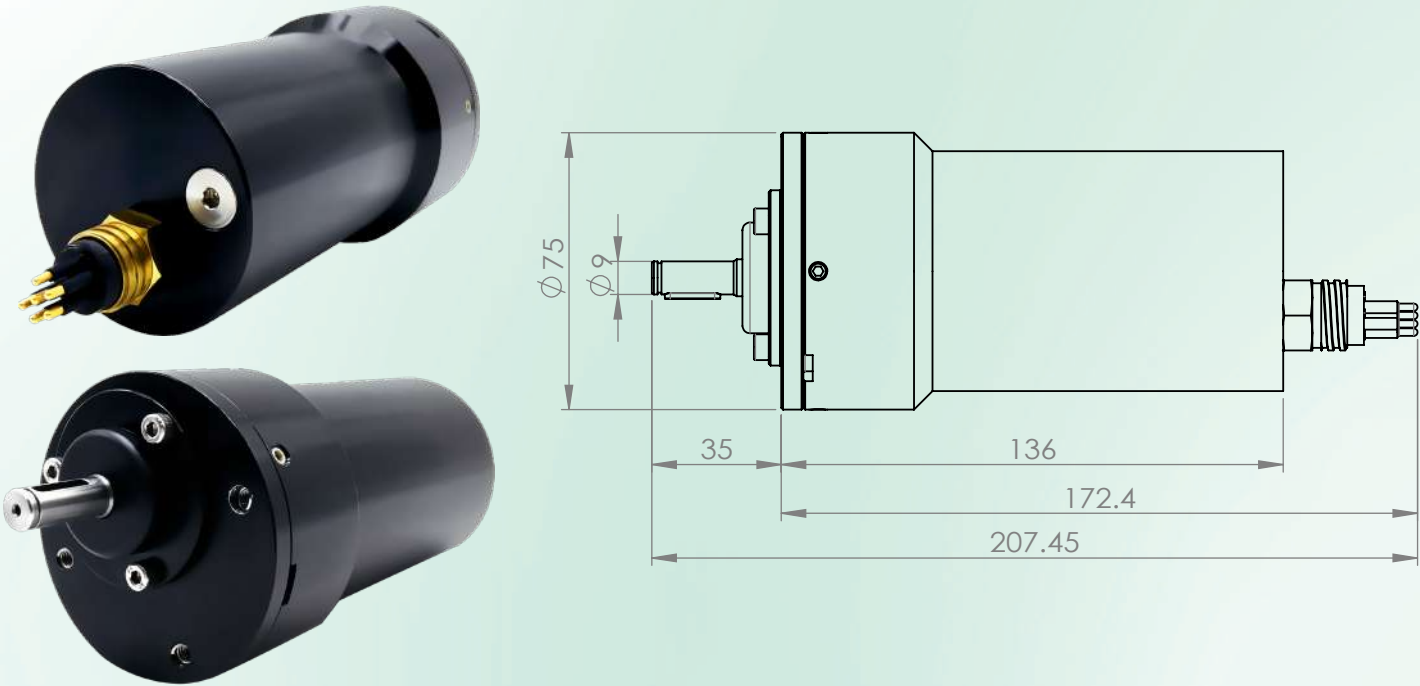

DWTM-4850

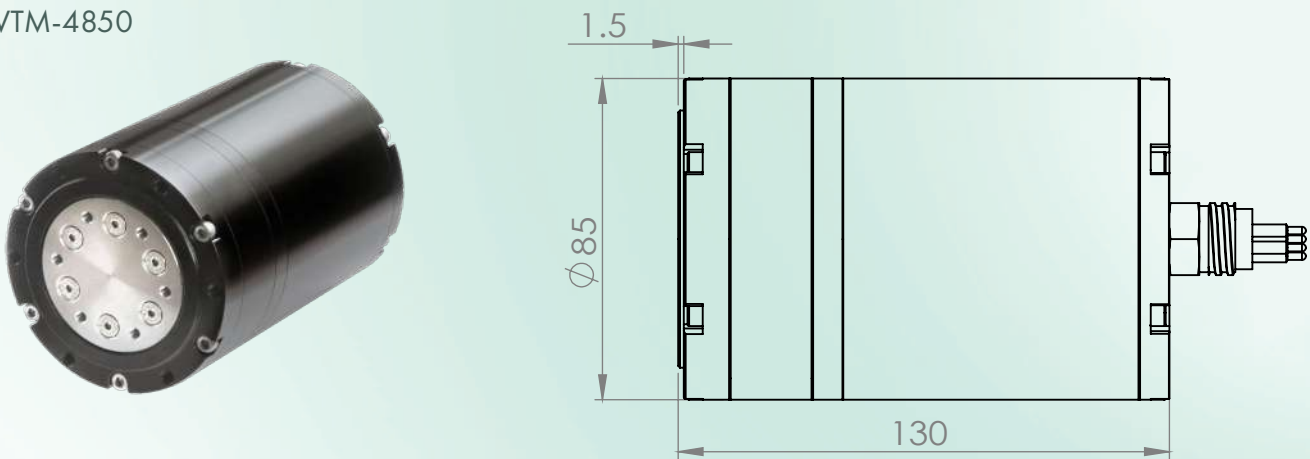

Features

- ✓ Programmable limitation of rotation angle

✓ High torque output

✓ Digital control via RS-232 / 485

✓ Easy installation & short start-up time
- ✓ ROV

✓ Underwater survey system

✓ Offshore, defense, O&G subsea systems

Applications

Model	DWTM-2408	DWTM-4850
Image		
Power Supply	24 VDC @ 6 A (Max)	48VDC @ 6 A (Max)
Speed	8 RPM (Max)	14 RPM(Max)
Torque	7 Nm	50 Nm
Precision	0.1°	0.1°
Material	Hard Anodized 6061-T6 Aluminum	Hard Anodized 6061-T6 Aluminum
Communication	RS-232 / RS-485	RS-232/RS-485
Dimension	Ø 75mm * 171 mm	Ø 85mm * 130mm
Weight (1000m)	989 g (in air) ; 486 g (in water)	2.3 kg
Depth Rating	1,000 / 3,000 m (optional)	1,000m
Operation Temp	-10℃ ~50℃	-10℃ ~50℃
Connector	MCBH6M	MCBH6M

※ All product descriptions and specifications are subject to be changed without notice.